

CWKS-HCA Series Handicap Accessible Surface Mounted Corner Wall Shower



Recommended Specifications

Handicap Accessible, Surface Mounted Corner Wall Shower shall be: Willoughby Model No. **CWKS-HCA**
(Select from model number and options list on next page)

Shower cabinet shall be fabricated from 16 gauge, Type 304 stainless steel with exposed stainless surfaces polished to a #4 satin finish. Wall bracket shall be fabricated from 16 gauge, Type 304 stainless steel.

Standard equipment shall include:

- Shower valves (from Valve Selection options list)
- Shower heads (from Shower Head Selection options list)
- Mounting bracket


Shower face plate shall attach to mounting bracket with vandal resistant stainless steel security screws. Mounting bracket anchoring hardware by others. Unit requires no chase area for installation and maintenance.

Handicap Accessible:

The CWKS-HCA corner shower will conform to most, but not all, ADA requirements.

(Compliance shall be subject to the requirements of the local code authority based on installation-specific details and is the responsibility of the installer.)

Optional WaterSense Labeled ligature-resistant shower head available (LRSH).

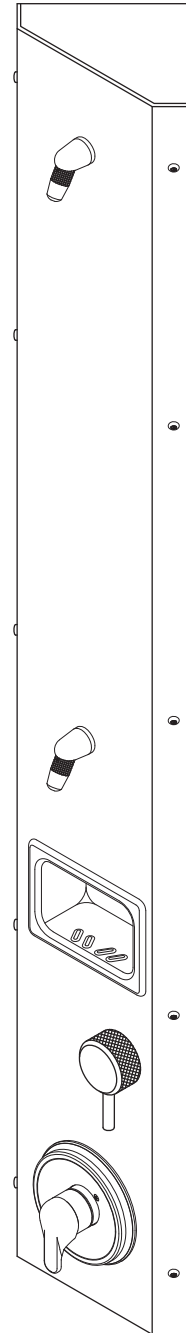

(Unit may be shown with optional features)

To specify fixture and accessories, use the Model Number and Options page.

Example: To specify a Handicap Accessible, Surface Mounted Corner Wall Shower with temp./ pressure-balancing mixing valve, diverter valve, standard 2.5 GPM flow rate, (2) APS adjustable vandal-resistant shower heads, and recessed soap dish

Use the following Willoughby Model Number:

CWKS-HCA-TPV-DV-2.5-APS-2HD-RD



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov



MADE IN THE U.S.A.

visit our website at www.willoughby-ind.com
5105 West 78th Street • Indianapolis, IN. 46268
(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

MODEL NUMBER AND OPTIONS:

1.) Base Model Number:

- CWKS-HCA Handicap Accessible, Surface Mounted
Corner Wall Shower

2.) Valve Selection:

- NV No Valve
- PML1 Single Temp. Pneumatic Metering
- PML2 Dual Temp. Pneumatic Metering
- E1L1 Single Temp. Electronic (Pick Control)*
- E1L2 Dual Temp. Electronic (Pick Control)*
- PBV Pressure-Balancing Mixing Valve
- TPV Temperature/Pressure-Balancing Mixing Valve
- TPLR Ligature-resistant Temp/Pressure-balancing Mixing Valve**
- SVCL Single Temp. Compression Valve (w/ ADA lever handle)
- DVCL Dual Temp. Compression Valves (w/ ADA lever handle)
- MA2 **Valve Manifold Option (Pneumatic or Electronic Valves Only):**
(See the Manifold Option Page at the end of
Catalog Section C14 for further information)

3.) Diverter Valve:

- DV Diverter Valve
- DVLR Ligature-resistant Diverter Valve
- PML1-MA2 Two Single Temp. Pneumatic Metering Valves
(Used to divert water flow to either upper, lower, or both
shower heads; for use with Mixing Valve options above)

4.) Push Button Selection:

- Pneumatic or Electronic Valves Only:*
- PBH Ligature-resistant Pneumatic Push Buttons**
- PZPB Ligature-resistant Piezo Electronic Push Buttons*/**

5.) Flow Rates:

- 2.5 GPM (Standard) 2.0 GPM 1.5 GPM

6.) Electronic Control* (Must Use Electronic Push Button):

- WUSC-2200 WUSC-2400 Pneumatic

7.) Shower Head Selection:

- APS Adjustable Vandal-resistant Shower Head
- NPS Non-Adjustable Vandal-resistant Shower Head
- UBJ Universal Ball Joint Shower Head
- LBJ Lockable Ball Joint Shower Head
- CSH Ligature-resistant Shower Head**
- FX Hand-held Flexshower Head (w/ quick disconnect, vacuum breaker,
and (1) hook)
- LRSH Ligature-resistant Shower Head, WaterSense Labeled Insert
(1.5 GPM & 2.0 GPM Flow Rate only) **
- 2HD Dual Fixed Shower Heads (replaces (FX) Flexshower
head w/ second of the selected fixed Shower Head)

8.) Other Options:

- TF24H Hard-wired Transformer, 110VAC to 24VAC* (Standard)
- TF24P Plug-in Transformer, 110VAC to 24VAC*
- TMV Inline Thermostatic Mixing Valve
- HL Hi-Lo (2 Hooks For Flexshower, Wall Mounted)
- SLB24 24" Adjustable Slide Bar (for Flexshower, Wall Mounted)
- SD Surface Mounted Soap Dish
- RD Recessed Mounted Soap Dish
- PS Pipe Shroud (Specify Length): _____
- Other _____


*(Req. 110V power through ground fault interrupter (GFCI) receptacle / breaker)

**LIGATURE-RESISTANT DISCLAIMER

This product is designed to minimize ligature points. While every effort has been made to reduce the possibility of ligature points, this product does not eliminate all risks. Ligature-Resistant products by Willoughby Industries are to be used in conjunction with, not as a replacement for, trained professionals.

Approved For Manufacturing By: _____ Date: _____ Company: _____
Wall Thickness: _____ Wall Type: _____

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN
WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND
DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

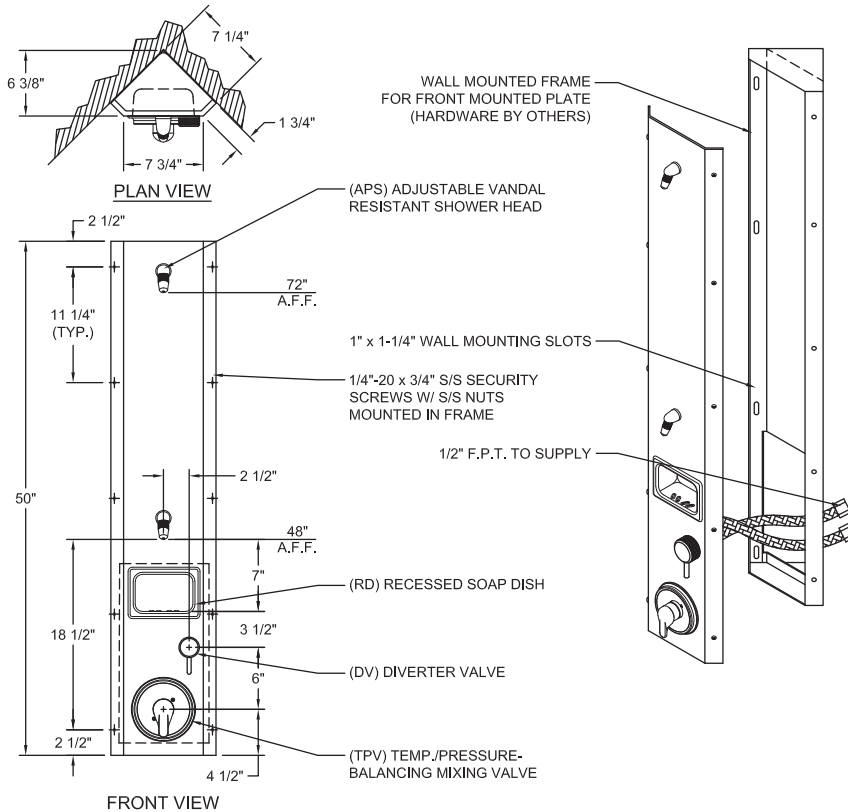

visit our website at www.willoughby-ind.com

5105 West 78th Street • Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.