


SS Series Stainless Steel Rear Mounted Service Sink

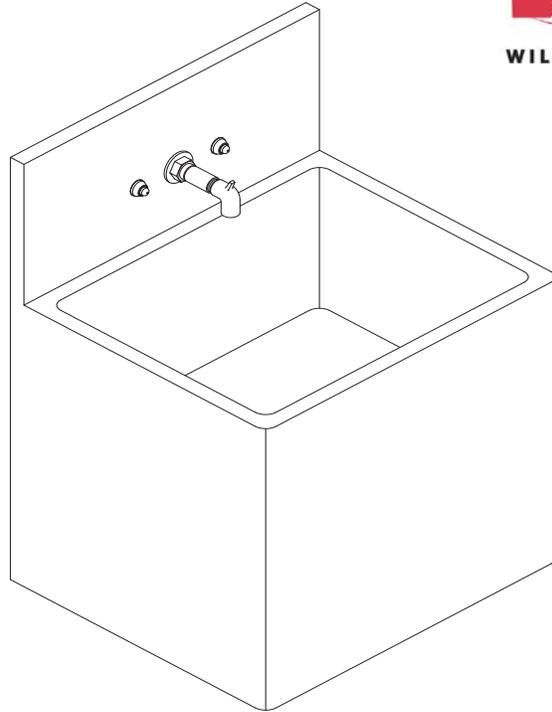

(Unit may be shown with optional features)

To specify fixture and accessories, use the Model Number and Options page.

Example: To specify a 22" x 19" Rear Mounted Service Sink, off the floor mounted, with plain end spout, dual temp. pneumatic metering valve ligature-resistant pneumatic push buttons and standard elbow waste

Use the following Willoughby Model Number:

SS-2219-OF-SE-PML2-PBH-EB

Recommended Specifications

Stainless Steel, Rear Mounted, Service Sink shall be:
Willoughby Model No. **SS**
(Select from model number and options list on next page)

Entire fixture, including bracing and internal plumbing, shall be fabricated from 14 GA., Type 304 stainless steel. The construction shall be all welded, with exposed stainless surfaces polished to a #4 satin finish.

Standard equipment shall include:

- Rectangular shaped, 10" deep sink bowl
- Fast drain with air vent
- Elbow Waste (2" F.I.P.)
- 0.5 GPM flow rate

Anchoring shall be by 6 or 8 point system: threaded rods, nuts and washers furnished for walls up to 8" thick. Unit requires chase area for installation and maintenance.



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov

visit our website at www.willoughby-ind.com
5105 West 78th Street • Indianapolis, IN. 46268
(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.

MODEL NUMBER AND OPTIONS:

1.) Base Model Number:

- SS-2219 22" x 19" Stainless Steel, Rear Mounted, Service Sink
- SS-2419 24" x 19" Stainless Steel, Rear Mounted, Service Sink

2.) Fixture Mounting & Waste:

- OF Off-Floor, Wall Outlet
- FM On-Floor, Wall Outlet

3.) Spout Selection:

- SE Spout with Plain End
- SHVB Spout with Hose End With Vacuum Breaker

4.) Lavatory Valve Selection:

- NV No Valve (Select Hole Punching if needed)
- PSL1 Single Temp. Pneumatic Non-metering
- PSL2 Dual Temp. Pneumatic Non-metering
- PML1 Single Temp. Pneumatic Metering
- PML2 Dual Temp. Pneumatic Metering
- E1L1 Single Temp. Electronic (pick control)*
- E1L2 Dual Temp. Electronic (pick control)*

Valve Manifold Options:

- Pneumatic or Electronic Only:
- MA2 MA3 MA4

5.) Lavatory Valve Actuation:

- PBH Ligature-resistant Pneumatic Push Buttons**
- PZPB Ligature-resistant Piezo Electronic Push Buttons**

6.) Electronic Controls* (Must Use Electronic Push Button):

- WUCC-3010 Pneutronic WMSII
- (The WUCC-3010 Control can be used to pair a Sink with a Toilet)

7.) Hole Punching:

- 4CC 4" Centerset, Ø1-1/4" Holes (Specify 2 or 3 holes: ___)
- 8CC 8" Centerset, Ø1-1/4" Holes (Specify 2 or 3 holes: ___)
- 1CC Center Shank, (1) Ø1-1/4" Hole
- SP Special Punching (Specify hole punching dim.)
SP: _____

8.) Lavatory Waste:

- EB Elbow Waste (Standard)
- PT Integral 'P'-Trap
- LWE Lavatory Waste Extension

9.) Options:

- MT Wall Template
- WS Wall Sleeve (Requires Accessible Chase)
- SD Surface Mounted Soap Dish
- TF24H Hard-wired Transformer, 110VAC to 24VAC*
- TF24P Plug-in Transformer, 110VAC to 24VAC*
- VG Ventilation Grille (Specify Location and Free Area)
- DC Decorator Color (Fixture exterior only - White)
- TG 12 Gauge Cabinet
- Other: _____
- Other: _____



*(Req. 110V power through ground fault interrupter (GFCI) receptacle / breaker)

**LIGATURE-RESISTANT DISCLAIMER


This product is designed to minimize ligature points. While every effort has been made to reduce the possibility of ligature points, this product does not eliminate all risks. Ligature-Resistant products by Willoughby Industries are to be used in conjunction with, not as a replacement for, trained professionals.

Approved For Manufacturing By: _____ Date: _____ Company: _____
Wall Thickness: _____ Wall Type: _____

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN.
WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

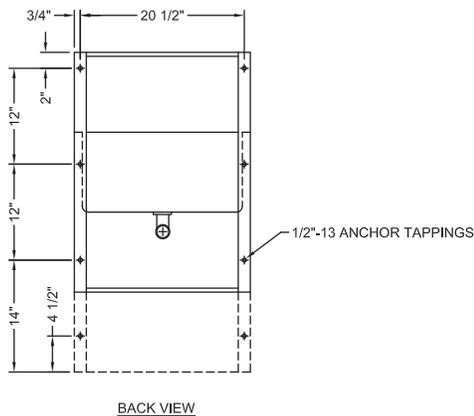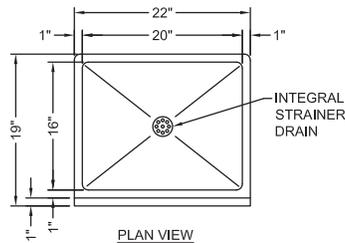

- 'OF' = WALL HUNG
- 'FM' = FLOOR MOUNT

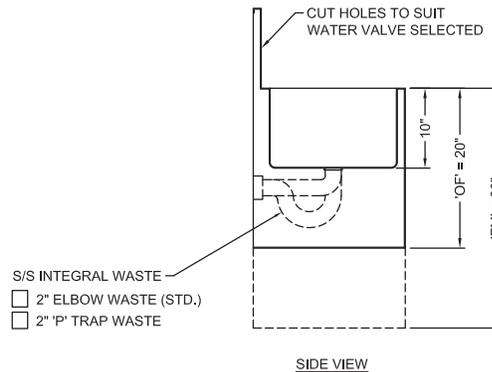

visit our website at www.willoughby-ind.com
5105 West 78th Street • Indianapolis, IN. 46268
(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.