


## UF-1438 Stainless Steel Single Person Floor Mounted Stall Urinal

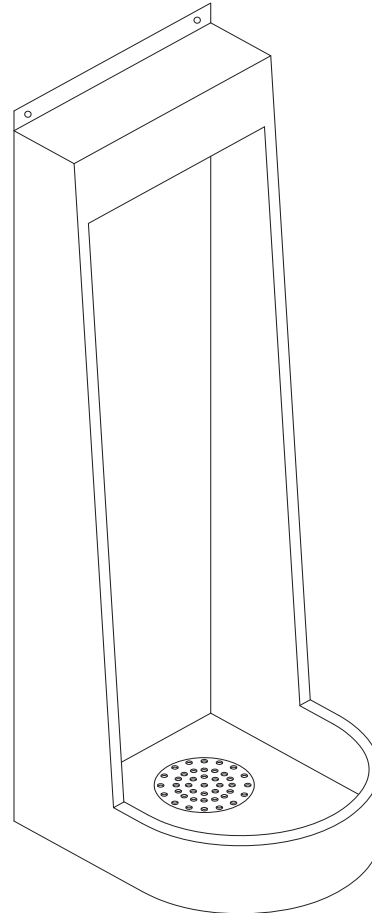

*(Unit may be shown with optional features)*

To specify fixture and accessories, use the Model Number and Options page.

Example: To specify a Stainless Steel, Single Person, Floor Mounted Stall Urinal with back spud, hydraulic flush valve, flush valve connection, and flush valve access panel

Use the following Willoughby Model Number:  
**UF-1438-BS-FV-FVT-AP**

### Recommended Specifications

Stainless Steel, Single Person, Floor Mounted Stall Urinal shall be: Willoughby Model No. **UF-1438**  
(Select from model number and options list on next page)

Fixture is fabricated from 14 GA., Type 304 stainless steel. The construction shall be all-welded with exposed stainless surfaces polished to a #4 satin finish.

Standard equipment shall include:  
- Full perimeter 360° flushing rim  
- Flat strainer

Urinal shall be washout type which requires 25 PSI minimum flushing pressure. Waste connection shall be 2" caulk type.

Anchoring shall be from the front with anchoring hardware by others.

Unit requires no chase area for installation and maintenance unless specified with (BS) Back Spud or any other options requiring an accessible chase.



**WARNING:** Cancer and Reproductive Harm

- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

visit our website at [www.willoughby-ind.com](http://www.willoughby-ind.com)  
5105 West 78th Street • Indianapolis, IN. 46268  
(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.

# MODEL NUMBER AND OPTIONS:

**1.) Base Model Number:**

UF-1438      Stainless Steel, Single Person, Floor Mounted Stall Urinal

**5.) Electronic Controls\* (Must Use Electronic Flush Valve):**

WUFC-4000       Pneutronic       WMSII

**2.) Inlet Location:**

BS      Back Spud  
 TS      Top Spud

\*(Req. 110V power through ground fault interrupter (GFCI) receptacle / breaker)

**3.) Flush Valve:**

FV      Hydraulic Flush Valve (Includes Actuator)  
            1.0 GPF Low Flow (3.8 Lpf)  
 EFVP    Electronic Flush Valve w/ (PZPB) Ligature-resistant Piezo  
           Push Button (Pick Control)\*\*  
            1.0 GPF Low Flow (3.8 Lpf)  
 NFV      No Flush Valve (Provided by Others)

**\*\*LIGATURE-RESISTANT DISCLAIMER**


This product is designed to minimize ligature points. While every effort has been made to reduce the possibility of ligature points, this product does not eliminate all risks. Ligature-Resistant products by Willoughby Industries are to be used in conjunction with, not as a replacement for, trained professionals.

**4.) Options:**

MT      Wall Template  
 ASUFVC    Ligature-resistant Urinal Flush Valve Cover  
           (Top Spud Only)\*\*  
 FVT      Flush Valve Connection (Back Spud Only)  
 AP      Flush Valve Access Panel (Allows access to chase mounted flush valve  
           from fixture side)  
 TF24H    Hard-wired Transformer, 110VAC to 24VAC\*  
 TF24P    Plug-in Transformer, 110VAC to 24VAC\*  
 Other      \_\_\_\_\_  
 Other      \_\_\_\_\_

Approved For Manufacturing By: \_\_\_\_\_ Date: \_\_\_\_\_ Company: \_\_\_\_\_  
 Wall Thickness: \_\_\_\_\_ Wall Type: \_\_\_\_\_

**VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN**  
 WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

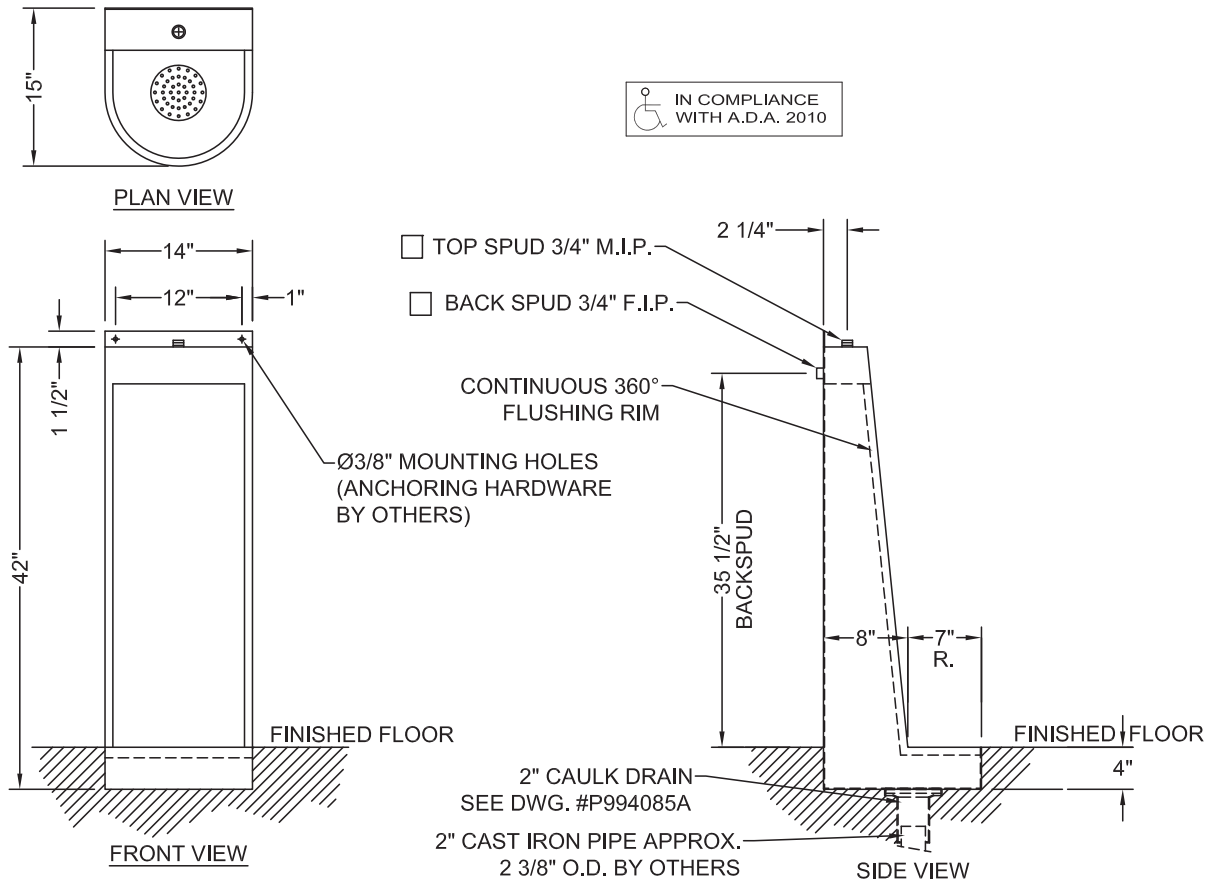

IN COMPLIANCE WITH A.D.A. 2010

visit our website at [www.willoughby-ind.com](http://www.willoughby-ind.com)  
 5105 West 78th Street • Indianapolis, IN. 46268  
 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.