
Willoughby Industries - Security Products

Front Access Cabinet Shower

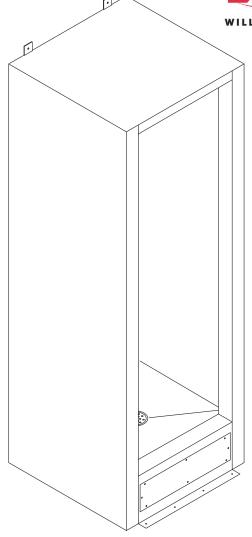

Please provide shower finish schedule upon ordering.

(Unit may be shown with optional features)

Recommended Specifications

Front Access Cabinet Shower shall be:
Willoughby Model No. ____S-___-FA
(Select from model number and options list on next page)

Shower cabinet shall be fabricated from 14 gauge, Type 304 stainless steel. Shower floor shall be fabricated from 11 gauge, Type 304 stainless steel. The construction shall be *all-welded* (unitized models only, not applicable to knockdown models), exposed stainless surfaces polished to a #4 satin finish, except shower floor which shall have a non-slip glass blast finish.

Standard equipment shall include:

- (NPS) non-adjustable penal shower head, mounted in a corner panel (plumbed to a top supply connection)
- (NHD) No-hub drain with removable strainer

Unit requires no chase area for installation and maintenance. Drain connection shall be through removable front access cover. Shower head and push button shall be mounted in a side mullion.

Underside of shower floor shall be sound deadened with fire resistant material.

To specify fixture and accessories, use the Model Number and Options page.

Example: To specify a unitized 36" x 36" Front Access Cabinet Shower with left hand shower head/valving, back wall with polished front, single temp. pneumatic metering valve, standard ligature-resistant pneumatic push button, 2.5 GPM flow rate, standard non-adjustable penal shower head and standard no-hub drain

Use the following Willoughby Model Number: US-3636-FA-L-A4-PML1-PBH-2.5GPM-NPS-NHD

To specify Knockdown Cabinet Shower: Select the "KS" model number from the list on the Model Number and Options page.

It is highly recommended that a floor drain be utilized at or near the shower entrance. The floor drain is to be provided by others.

Optional WaterSense Labeled ligature-resistant shower head available (LRSH).



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov

visit our website at www.willoughby-ind.com 5105 West 78th Street ● Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



© Rev. 5/2024 \$5-25

MODEL NUMBER AND OPTIONS:

1.) Base Model Number:		4.) Valve Selection:		9.) Drain Se	9.) Drain Selection:			
	cess Cabinet Showers:	■ NV	No Valve	■ NHD	No-hub Cabinet Shower Drain (2") (Standard)			
■ US-3030-FA	30"L x 30"W Cabinet Shower	PML1	Single Temp. Pneumatic Metering 9 🛡	ICD	Inside Caulk Cabinet Shower Drain (2")			
■ US-3232-FA	32"L x 32"W Cabinet Shower	PML2	Dual Temp. Pneumatic Metering 9 ®					
☐ US-3636-FA 36"L x 36"W Cabinet Shower		E1L1	Single Temp. Electronic (Pick Control)* 9 👨	10.) Option	s:			
Knockdown Front Access Cabinet Showers:		■ E1L2	Dual Temp. Electronic (Pick Control)* 9 🛡	□ VG	Ventilation Grille (Specify Free Area and			
■ KS-3030-FA	30"L x 30"W Cabinet Shower	□ PBV	Pressure-Balancing Mixing Valve		Location; Standard Grille Dimensions:			
■ KS-3232-FA	32"L x 32"W Cabinet Shower	□ TPV	Temp/Pressure-Balancing Mixing Valve		8-3/4" x 8-3/4" with 15-3/4 in ² open area)			
☐ KS-3636-FA 36"L x 36"W Cabinet Shower		TPLR	Ligature-resistant Temp/Pressure-	□ CP	Closure Panels			
			Balancing Mixing Valve		(Specify Dimensions and Locations)			
2.) Shower Head/Push Button Orientation:		Valve Manifold Option:		☐ STC	Sloping Top Closure			
L Left Hand		Pneumatic or Electronic Valves Only:		MD_	Modesty Door			
R Right Hand		(See the Manifold Option Page at the end of			☐ L Hinged Left			
_		Catalog	Section S5 for further information)		R Hinged Right			
3.) Cabinet Side Exterior Finish Schedule:		□ MA2		☐ CR	Curtain Rod (Less Curtain and Hooks)			
(Based o	on Chase Wall Orientation;			LRSC	Ligature-Reistant Curtain with Track ©			
see the C	Options Pages at the end of	5.) Push Bi	utton Selection:	☐ TH1	Release Towel Hook 6 🖫			
Catalog S	Section for diagram)	Pneumatio	or Electronic Valves Only:	RD	Recessed Mounted Soap Dish & ®			
For (BCS) Back Wall:		□ PBH	Ligature-resistant Pneumatic	SD	Surface Mounted Soap Dish			
	Front, Left Side, & Right Side	_	Push Buttons 6 ®	☐ TMV	In-line Thermostatic Mixing Valve			
_	Front & Right Side	□ PZPB	Ligature-resistant Piezo Electronic	☐ TF24H	Hard-wired Transformer, 110VAC to 24VAC*			
	Front & Left Side	_	Push Buttons*	☐ TF24P	Plug-in Transformer, 110VAC to 24VAC*			
	Front only			☐ LRD5	5" Ligature-resistant Drain Cover ®			
For (LCS) Left Wall:		6.) Flow Rates:			(Requires Drain Modification for EBD & NHD Options)			
	Front, Back Side, & Right Side	2.5 GPM (Standard)		☐ Other				
	Front & Right Side	☐ 2.0 GPN	,	Other				
	Front only	☐ 1.5 GPN		_ 0				
For (RCS) Right Wall:		_		*(Reg. 110	OV power through ground fault interrupter			
C1 Polished Front, Back Side, & Left Side		7.) Electronic Controls*		(GFCI) receptacle / breaker)				
_	Front & Left Side	,	se Electronic Push Button):	⊘ For secu	rity applications			
			□ WUSC-2200 □ WUSC-2400		© Ligature-resistant option**			
- constitue	r ronk only	☐ Pneutro	-	S Ligature-	resistant option			
		_		**I ICATUD	E-RESISTANT DISCLAIMER			
		8.) Shower Head Selection:			This product is designed to minimize ligature points. While every effort			
		NPS Non-adjustable Penal Shower Head		has been made to reduce the possibility of ligature points, this product				
		☐ INF3	(Standard) 9		minate all risks. Ligature-Resistant products by Willoughby			
		☐ APS	Adjustable Penal Shower Head		re to be used in conjunction with, not as a replacement for,			
		CSH	Ligature-resistant Shower Head ©	trained profe				
		☐ LRSH	•	traineu prote	รองเบเตเง.			
		LKSH	Ligature-resistant Shower Head, WaterSense					

Approved For Manufacturing By:		Date:	_ Company:
Wall Thickness:	Wall Type:		

Labeled Insert (1.5 GPM & 2.0 GPM Flow Rate

available only) 🛡

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

B	REMOVABLE STRAINER						
	GRATE, SECURED W/		STANDAR	LS	SIZE	DRAIN	
	VANDAL RESISTANT SCREWS		UNITIZED		KNOCK DOWN	A-B	С
A	SUNEWS		US-3030-FA		KS-3030-FA	30"	15"
	11 GA, S/S FLOOR		US-3232-FA		KS-3232-FA	32"	16"
	W/ SLIP-RESISTANT GLASS BLAST FINISH		US-3636-FA		KS-3636-FA	36"	18"
3"		7) SHOWER HEAD		—A—			
75 1/2" OPENING	(SHOWN OUT OF POSITION) FRONT PNEUMATIC PUSH BUTTON. MOUNTED IN SIDE MULLION (SHOWN OUT OF POSITION) 14 GA. S/S STALL, ALL WELDED SEAMS SHOWER						
88°*	(N/A TO KNOCKDOWN) 3/8" O.D. FLEXIBLE TUBING	PNEUM	"LD. — ATIC SING		48" PUSH BUTTON	HEAD	`
11/2"	28" x 6" 14 GA, S/S ACCESS COVER W/ VANDAL RESISTANT S/S SCREWS PROVIDED	10	1/2"		-c	9"	
FRONT VIEW	SEE DRAIN DETAIL SHEET #P954143A	PNEUMATIC V/ W/ 20" LONG LEXIBLE SUPPLY	6 1/2"	. ∨IEW			

visit our website at www.willoughby-ind.com

5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065