


## WBS Series Ligature-resistant Surface Mounted Behavioral Wall Shower

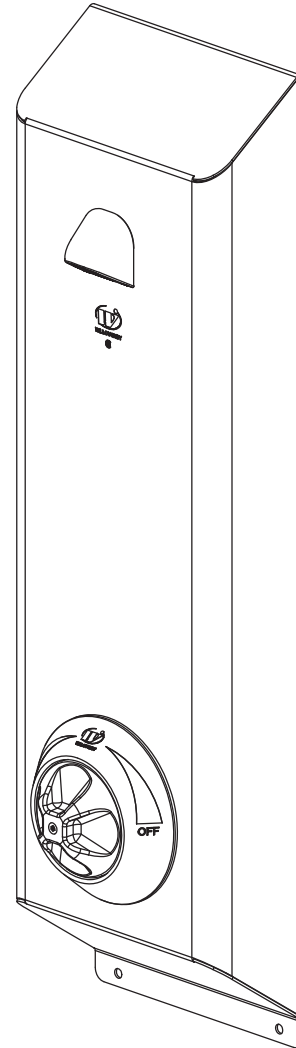

### Recommended Specifications

Ligature-resistant Surface Mounted Behavioral Wall Shower shall be: Willoughby Model No. **WBS**  
(Select from Model & Options list on next page)

Shower cabinet shall be fabricated from 16 gauge, Type 304 stainless steel, with exposed stainless surfaces polished to a #4 satin finish.

Standard equipment shall include:

- Shower valves and appropriate controls (from Valve Selection options)
- (LRSH) Ligature-resistant shower head, WaterSense Labeled 2.0 GPM flow rate
- Ligature-resistant cabinet with sloped top and bottom
- Z-clip mounting bracket

Anchoring shall be by Z-clip and bottom flange with anchoring hardware by others. Shower unit shall be factory assembled, tested for proper operation, and ready for installation by a contractor. Unit requires no chase area for installation and maintenance.

Optional WaterSense Labeled ligature-resistant shower head available (LRSH).

(Unit may be shown with optional features)

To specify fixture and accessories, use the Model Number and Options page.

Example: To specify a Ligature-resistant Surface Mounted Behavioral Wall Shower with Ligature-resistant Temp/Pressure-Balancing Mixing Valve, and LRSH Ligature-resistant Shower Head

Use the following Willoughby Model Number:

**WBS-TPLR-LRSH**



**WARNING:** Cancer and Reproductive Harm

- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



MADE IN THE U.S.A.

visit our website at [www.willoughby-ind.com](http://www.willoughby-ind.com)  
5105 West 78th Street • Indianapolis, IN. 46268  
(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

# MODEL NUMBER AND OPTIONS:

## 1.) Base Model Number:

- WBS Ligature-resistant Surface Mounted Behavioral Wall Shower

## 2.) Valve Selection:

- NV No Valve (Provided by Others)  
 Special Hole Punching Dimension: \_\_\_\_\_
- PML1 Single Temp. Pneumatic Metering  
 PML2 Dual Temp. Pneumatic Metering  
 E1L1 Single Temp. Electronic (Pick Control)\*  
 E1L2 Dual Temp. Electronic (Pick Control)\*  
 TPLR Ligature-resistant Temp/Pressure-balancing Mixing Valve

## 3.) Push Button Selection:

*Pneumatic or Electronic Valves Only:*

- PBH Ligature-resistant Pneumatic Push Buttons  
 PZPB Ligature-resistant Piezo Electronic Push Buttons\*

## 4.) Flow Rates:

- 2.5 GPM       2.0 GPM       1.5 GPM

## 5.) Electronic Control\* (Must Use Electronic Push Button):

- WUSC-2200       WUSC-2400       Pneutronic       WMS II

## 6.) Shower Head and Flow Rate Option:

- LRSH Ligature-resistant Shower Head, WaterSense Labeled Insert (1.5 GPM & 2.0 GPM Flow Rate only) (Standard)  
 CSH Ligature-resistant Shower Head

## 7.) Other Options:

- TF24H Hard-wired Transformer, 110VAC to 24VAC\*  
 TF24P Plug-in Transformer, 110VAC to 24VAC\*  
 TMV Inline Thermostatic Mixing Valve  
 RD Recessed Mounted Soap Dish (Cabinet Mounted)  
 RSD2 Recessed Soap Dish (In-Wall Mounted)  
 PS Pipe Shroud (Wall Mounted, Specify Length): \_\_\_\_\_  
 (Pipe Shroud option changes Sloped Top to Flat Top)
- Other \_\_\_\_\_  
 Other \_\_\_\_\_


\*(Req. 110VAC power through ground fault interrupter (GFCI) receptacle / breaker)

## LIGATURE-RESISTANT DISCLAIMER

This product is designed to minimize ligature points. While every effort has been made to reduce the possibility of ligature points, this product does not eliminate all risks. Ligature-Resistant products by Willoughby Industries are to be used in conjunction with, not as a replacement for, trained professionals.

Approved For Manufacturing By: \_\_\_\_\_ Date: \_\_\_\_\_ Company: \_\_\_\_\_  
 Wall Thickness: \_\_\_\_\_ Wall Type: \_\_\_\_\_

**VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN**  
 WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

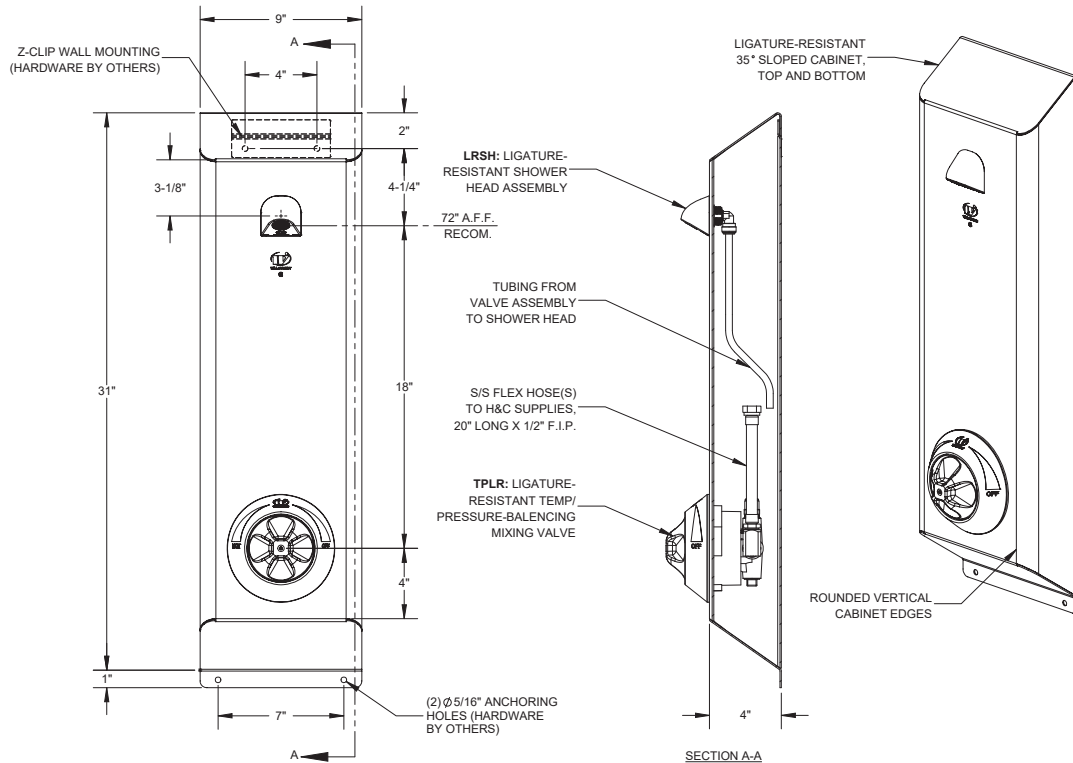

visit our website at [www.willoughby-ind.com](http://www.willoughby-ind.com)  
 5105 West 78th Street • Indianapolis, IN. 46268  
 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.