


WRS-ADA Series ADA-Compliant Rear Mounted Recessed Shower Panel

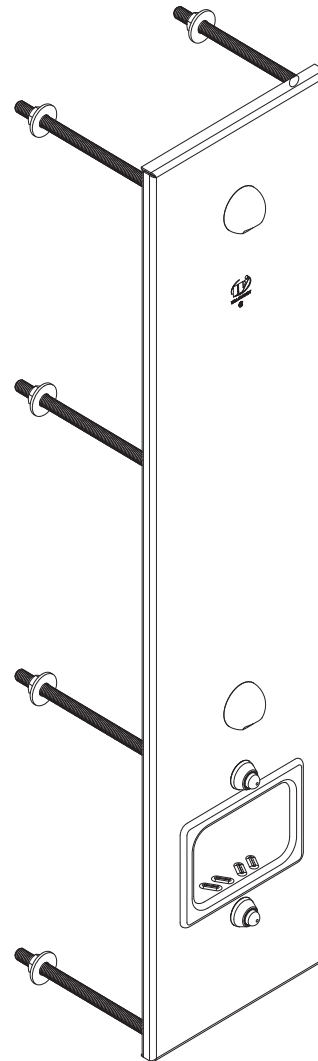

Recommended Specifications

ADA-Compliant, Rear Mounted, Recessed Shower Panel shall be: Willoughby Model No. **WRS-ADA**
(Select from model number and options list on next page)

Shower panel shall be fabricated from 14 gauge, Type 304 stainless steel with exposed stainless surfaces polished to a #4 satin finish.

Standard equipment shall include:

- Shower valves (from Valve Selection options list)
- Shower heads (from Shower Head Selection options list)

Anchoring shall be by standard 8-point system: 1/2" threaded rods, nuts and washers shall be furnished for walls up to 8" thick. Unit requires chase area for installation and maintenance.

Optional WaterSense Labeled ligature-resistant shower head available (LRSH).

(Unit may be shown with optional features)

To specify fixture and accessories, use the Model Number and Options page.

Example: To specify a Rear Mounted, Recessed Handicap Shower Panel w/ Hand Held Flexshower Head with left hand controls, single temp. pneumatic metering valves (manifolded), standard ligature-resistant pneumatic push buttons, standard 1.5 GPM flow rate, standard 2 (CSH) shower heads, and recessed mounted soap dish

Use the following Willoughby Model Number:

WRS-ADA-PML1-MA2-PBH-1.5GPM-CSH-2HD-RD



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov

visit our website at www.willoughby-ind.com
5105 West 78th Street • Indianapolis, IN. 46268
(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.

MODEL NUMBER AND OPTIONS:

1.) Base Model Number:

- WRS-ADA ADA-Compliant, Rear Mounted, Recessed Shower Panel

2.) Panel Orientation (Must Specify if Dual Temp. is Selected):

- L Left Hand Controls
 R Right Hand Controls

3.) Valve Selection:

- NV No Valve
 PML1 Single Temp. Pneumatic Metering **Ⓢ** **Ⓜ**
 PML2 Dual Temp. Pneumatic Metering **Ⓢ** **Ⓜ**
 E1L1 Single Temp. Electronic (Pick Control)* **Ⓢ** **Ⓜ**
 E1L2 Dual Temp. Electronic (Pick Control)* **Ⓢ** **Ⓜ**

Valve Manifold Option:

Pneumatic or Electronic Valves Only:

(See the Manifold Option Page at the end of Catalog Section S5 for further information)

- MA2

4.) Push Button Selection:

Pneumatic or Electronic Valves Only:

- PBH Ligature-resistant Pneumatic Push Buttons **Ⓢ** **Ⓜ**
 PZPB Ligature-resistant Piezo Electronic Push Buttons* **Ⓢ** **Ⓜ**

5.) Flow Rates:

- 2.5 GPM (Standard)
 2.0 GPM
 1.5 GPM

6.) Electronic Controls* (Must Use Electronic Push Button):

- WUSC-2200 WUSC-2400 Pneumatic WMS II

7.) Shower Head Selection:

- APS Adjustable Vandal-resistant Shower Head
 NPS Non-Adjustable Vandal-resistant Shower Head **Ⓢ**
 UBJ Universal Ball Joint Shower Head
 LBJ Lockable Ball Joint Shower Head
 CSH Ligature-resistant Shower Head **Ⓢ** **Ⓜ**
 LRSH Ligature-resistant Shower Head, WaterSense Labeled Insert (1.5 GPM & 2.0 GPM Flow Rate only) **Ⓜ**
 FX Hand-held Flexshower Head (w/ quick disconnect, vacuum breaker, and (1) hook)
 LRFX Ligature-resistant Quick Disconnect Hand Held Shower **Ⓜ**
 2HD Dual Fixed Shower Heads **Ⓢ**

8.) Options:

- FSS Fold-up Stainless Steel Shower Seat **Ⓢ**
 HL Hi-Lo (2 Hooks For Flexshower, Wall Mounted)
 MT Wall Template
 TMV In-line Thermostatic Mixing Valve
 TF24H Hard-wired Transformer, 110VAC to 24VAC*
 TF24P Plug-in Transformer, 110VAC to 24VAC*
 RD Recessed Mounted Soap Dish **Ⓢ** **Ⓜ**
 SLB24 24" Adjustable Slide Bar (for Flexshower, Wall Mounted)
 SD Surface Mounted Soap Dish
 WS Wall Sleeve (Requires Accessible Chase)
 Other _____

* (Req. 110V power through ground fault interrupter (GFCI) receptacle / breaker)

Ⓢ For security applications

Ⓜ Ligature-resistant option**


****LIGATURE-RESISTANT DISCLAIMER**

This product is designed to minimize ligature points. While every effort has been made to reduce the possibility of ligature points, this product does not eliminate all risks. Ligature-Resistant products by Willoughby Industries are to be used in conjunction with, not as a replacement for, trained professionals.

Approved For Manufacturing By: _____ Date: _____ Company: _____
 Wall Thickness: _____ Wall Type: _____



VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN
 WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

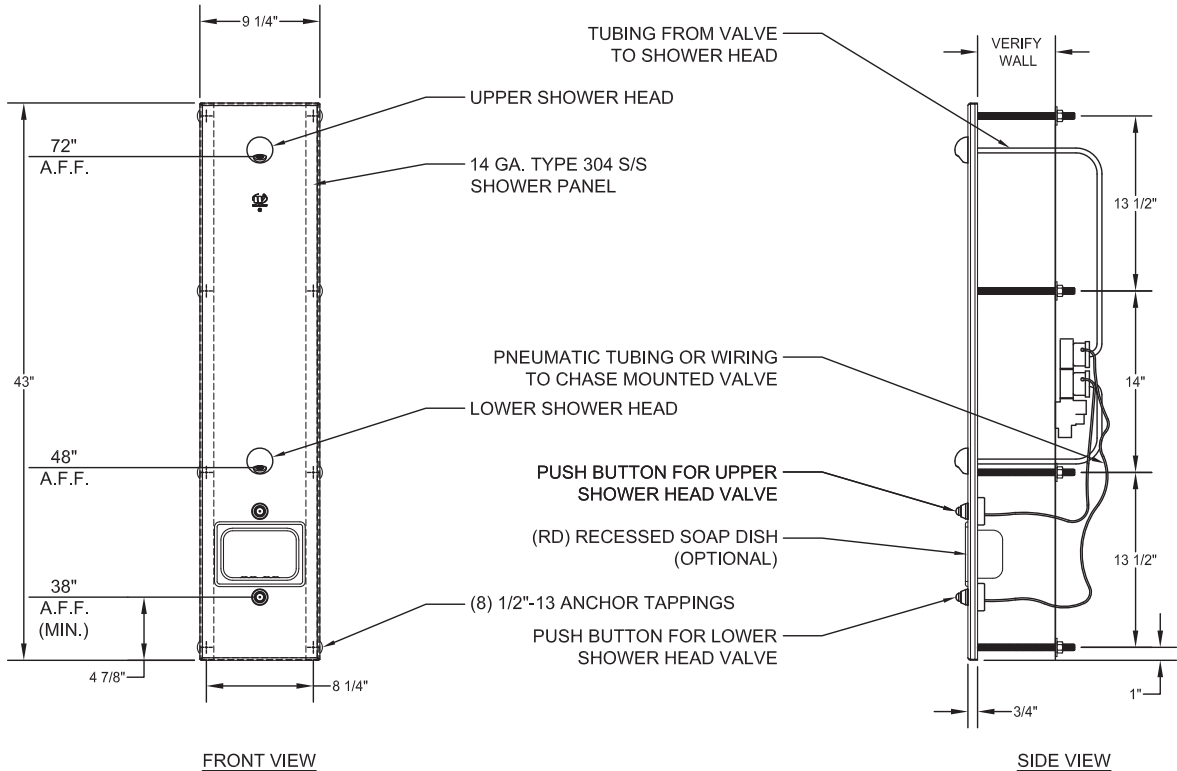

visit our website at www.willoughby-ind.com
 5105 West 78th Street • Indianapolis, IN. 46268
 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.