


## CSH Ligature-resistant Vandal Resistant Shower Head (#380069A)

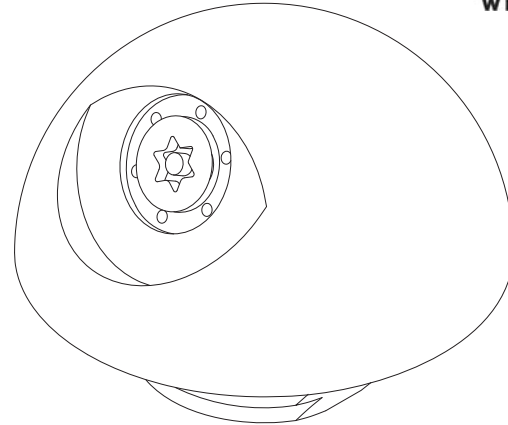


*(Unit may be shown with optional features)*

### Recommended Specifications


Willoughby model CSH ligature-resistant, vandal resistant shower head shall be fixed type, constructed of Type 303 stainless steel, mounted from the rear with no visible fasteners, and shall have a 30° angle of spray through a Delrin insert, retained by a stainless steel Pin-Torx security screw. The head shall have 3/8" F.I.P. threads on the inlet. The entire unit has a ligature-resistant rounded and tapered design.

#### OPTIONS:

- CSH17 17° angle of spray (#380024)
- FA CSH With Stainless Steel Front Mounted Plate (For Non Fixture Applications)
  
- 2.5 2.5 Flow (Standard)
- 2.0 2.0 In-line Flow Control  
(See detail below; tubing must be 3/8" O.D. polyethylene)
- 1.5 1.5 In-line Flow Control  
(See detail below; tubing must be 3/8" O.D. polyethylene)

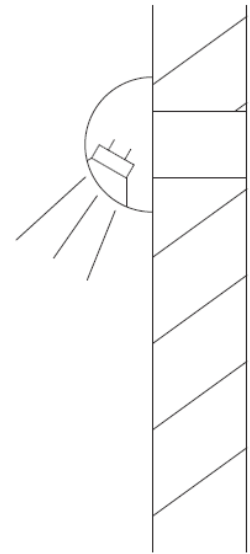

**PART #380142-XX (SPECIFY FLOW)**  
**IN-LINE FLOW CONTROL ASSEMBLY**

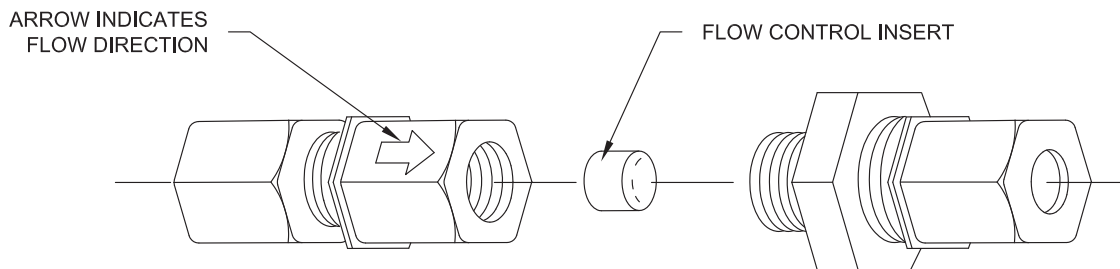

#### **LIGATURE-RESISTANT DISCLAIMER**

This product is designed to minimize ligature points. While every effort has been made to reduce the possibility of ligature points, this product does not eliminate all risks. Ligature-Resistant products by Willoughby Industries are to be used in conjunction with, not as a replacement for, trained professionals.



**WARNING: Cancer and Reproductive Harm**

- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

visit our website at [www.willoughby-ind.com](http://www.willoughby-ind.com)  
5105 West 78th Street • Indianapolis, IN. 46268  
(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



**MADE IN THE U.S.A.**