


CHS-1013-46 Stainless Steel Rear Mounted China Alternative Lavatory*

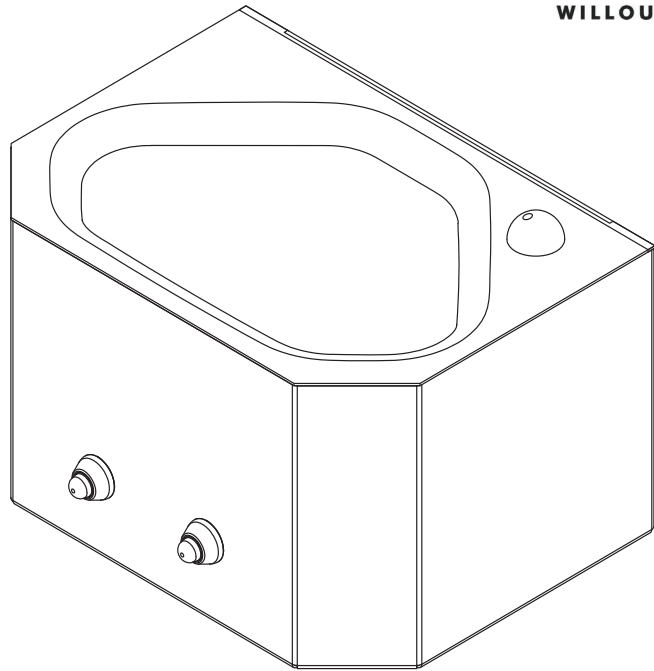

(Unit may be shown with optional features)

To specify fixture and accessories, use the Model Number and Options page.

Example: To specify a China Alternative Lavatory with ligature-resistant deck mounted bubbler, dual temp. pneumatic metering valve, ligature-resistant pneumatic push buttons, elbow waste, and single towel hook

Use the following Willoughby Model Number:

CHS-1013-46-DMBH-PML2-PBH-TH1

Recommended Specifications

Stainless Steel, Rear Mounted, China Alternative Lavatory shall be: Willoughby Model No. **CHS-1013-46**
(Select from model number and options list on next page)

Fixture shall be fabricated from 16 GA., Type 304 stainless steel. The construction shall be all welded, with exposed stainless surfaces having a bead blast finish. Lavatory underside shall be exposed with non-polished finish.

Standard lavatory shall include:

- Multi-sided bowl, 12-3/4" x 8-1/4" x 5" deep
- Stainless steel deck mounted bubbler
- Fast drain with air vent
- Integral Elbow Waste w/ 6-1/2" lav. waste extension and Ø1-1/2" no-hub waste connection
- 0.5 GPM flow rate

Anchoring shall be by standard 4-point system: threaded rods, nuts and washers. Unit is wall hung and shall require chase area for installation and maintenance.

*Designed to be a lower cost lavatory to more closely compete with Viteous China.



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov

visit our website at www.willoughby-ind.com
5105 West 78th Street • Indianapolis, IN. 46268
(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.

MODEL NUMBER AND OPTIONS:

1.) Base Model Number:

- ☐ CHS-1013-46 Stainless Steel, Rear Mounted, China Alternative Lavatory

2.) Bubbler Selection:

- ☐ DMBH Ligature-resistant Deck Mounted Bubbler (Standard)**
(Not for ADA compliant drinking)

3.) Lavatory Valve Selection:

- ☐ NV No Valve (Provided by Others)
☐ Special Hole Punching Dimension:

- ☐ PSL1 Single Temp. Pneumatic Non-metering
☐ PSL2 Dual Temp. Pneumatic Non-metering
☐ PML1 Single Temp. Pneumatic Metering
☐ PML2 Dual Temp. Pneumatic Metering
☐ E1L1 Single Temp. Electronic (pick control)*
☐ E1L2 Dual Temp. Electronic (pick control)*

Valve Manifold Options:

Pneumatic or Electronic Only:

- ☐ MA2 ☐ MA3 ☐ MA4

4.) Lavatory Valve Actuation:

- ☐ PBH Ligature-resistant Pneumatic Push Buttons**
☐ PZPB Ligature-resistant Piezo Electronic Push Buttons**

5.) Electronic Controls* (Must Use Electronic Push Button):

- ☐ WUCC-3010 ☐ Pneutronic ☐ WMSII
(The WUCC-3010 Control can be used to pair a Lavatory with a Toilet)

6.) Lavatory Waste:

- ☐ EB Integral Elbow Waste w/ 6-1/2" Lav. Waste Extension and 1-1/2" No-hub Waste Connection (Standard)
☐ PT Integral 'P'-Trap
☐ OV Lavatory Overflow
☐ SLOW Slow Drain
☐ LW1 Thru-Wall Extension, 'P'-Trap
☐ LW2 Thru-Wall Extension and Clean-Out
☐ LWC1 Coupling, 1-1/2" Tube to 1-1/2" Tube
☐ LWC2 Coupling, 1-1/2" Tube to 1-1/2" PVC/Cast Iron

7.) Options:

- ☐ MT Wall Template
☐ TB1 Single Toothbrush Holder
☐ Right ☐ Left
☐ TB2 Dual Toothbrush Holder
☐ Right ☐ Left
☐ TF24H Hard-wired Transformer, 110VAC to 24VAC*
☐ TF24P Plug-in Transformer, 110VAC to 24VAC*
☐ TH1 Single Towel Hook
☐ Right ☐ Left
☐ TH2 Dual Towel Hook
☐ Right ☐ Left
☐ WS Wall Sleeve (Requires Accessible Chase)
☐ ISH Integral Shelf
☐ Other: _____
☐ Other: _____


*(Req. 110V power through ground fault interrupter (GFCI) receptacle / breaker)

**LIGATURE-RESISTANT DISCLAIMER

This product is designed to minimize ligature points. While every effort has been made to reduce the possibility of ligature points, this product does not eliminate all risks. Ligature-Resistant products by Willoughby Industries are to be used in conjunction with, not as a replacement for, trained professionals.

Approved For Manufacturing By: _____ Date: _____ Company: _____
Wall Thickness: _____ Wall Type: _____

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN
WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

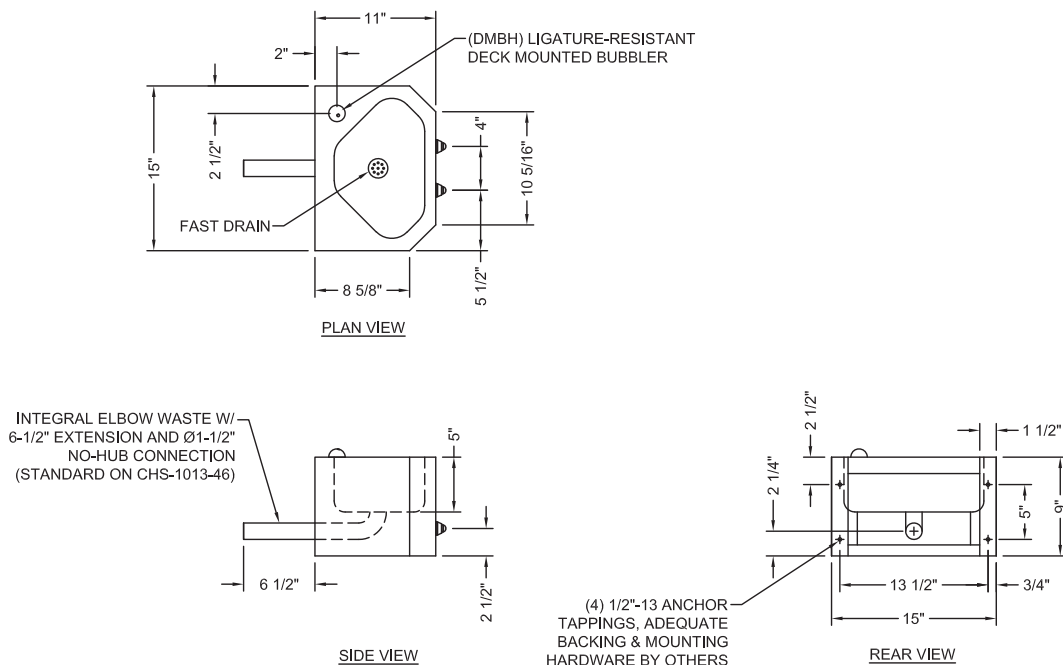

visit our website at www.willoughby-ind.com

5105 West 78th Street • Indianapolis, IN. 46268
(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.