


HS-1013-46-15-RPF Stainless Steel Replacement 15" Wide Rear Mounted Lavatory

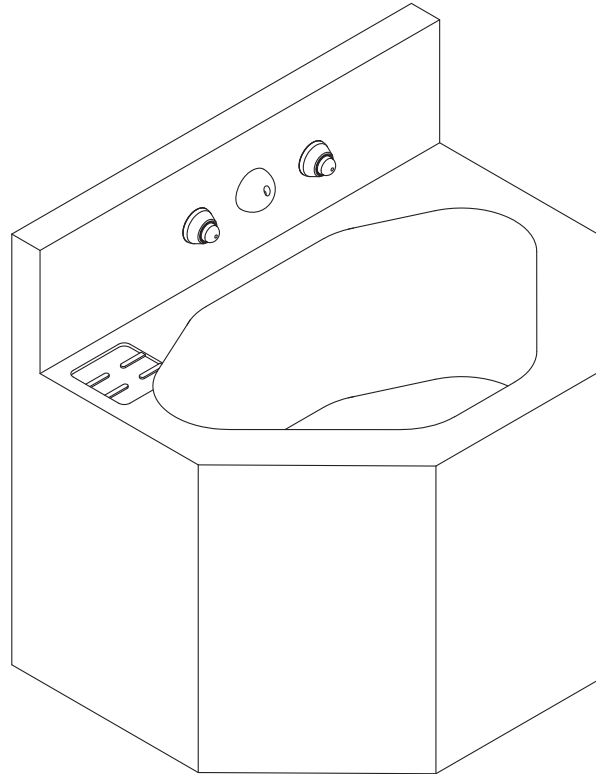

(Unit may be shown with optional features)

Recommended Specifications

Stainless Steel, Replacement, 15" Wide, Rear Mounted, Lavatory shall be: Willoughby Model No. **HS-1013-46-15-RPF**

Fixture shall be fabricated from 14 GA., Type 304 stainless steel. The construction shall be all welded, with exposed surfaces polished to a #3 satin finish.

Standard lavatory shall include:

- Multi-sided bowl, 12-3/4" x 8-1/4" x 5" deep
- Stainless steel penel bubbler/filler
- Fast drain with air vent
- Elbow waste (1-1/2" F.I.P.)
- Self-draining soap dish

Cabinet interior shall be sound deadened with fire-resistant material.

Anchoring shall be by standard 4-point system: threaded rods, nuts and washers shall be furnished for walls up to 8" thick. Unit shall require chase area for installation and maintenance.



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov

visit our website at www.willoughby-ind.com

5105 West 78th Street • Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.

MODEL NUMBER AND OPTIONS:

1.) Base Model Number:

- ☐ HS-1013-46-15-RPF Stainless Steel, Replacement, 15" Wide,
Rear Mounted, Lavatory

2.) Bubbler or Spout Selection:

- ☐ BC Code Bubbler/Filler
☐ BPH Ligature-resistant Bubbler/Filler**
☐ FLH Ligature-resistant Lavatory Filler**

3.) Lavatory Valve Selection:

- ☐ NV No Valve (Provided by Others)
☐ Special Hole Punching Dimension:

☐ PSL1 Single Temp. Pneumatic Non-metering
☐ PSL2 Dual Temp. Pneumatic Non-metering
☐ PML1 Single Temp. Pneumatic Metering
☐ PML2 Dual Temp. Pneumatic Metering
☐ E1L1 Single Temp. Electronic (pick control)*
☐ E1L2 Dual Temp. Electronic (pick control)*

Valve Manifold Options:

Pneumatic or Electronic Only:

- ☐ MA2 ☐ MA3 ☐ MA4

4.) Lavatory Valve Actuation:

- ☐ PBH Ligature-resistant Push Buttons**
☐ PZPB Ligature-resistant Piezo Piezo Push Buttons/**

5.) Electronic Controls* (Must Use Electronic Push Button):

- ☐ WUCC-3010 ☐ Pneutronic ☐ WMSII
(The WUCC-3010 Control can be used to pair a Sink with a Toilet)

6.) Lavatory Waste:

- ☐ EB Elbow Waste (1-1/2" F.I.P.) (Standard)
☐ SLOW Slow Drain

7.) Options:

- ☐ MT Wall Template
☐ TB1 Single Toothbrush Holder
☐ Right ☐ Left
☐ TB2 Dual Toothbrush Holder
☐ Right ☐ Left
☐ TH1 Single Towel Hook
☐ Right ☐ Left
☐ TH2 Dual Towel Hook
☐ Right ☐ Left
☐ ISH Integral Shelf
☐ TF24H Hard-wired Transformer, 110VAC to 24VAC*
☐ TF24P Plug-in Transformer, 110VAC to 24VAC*
☐ Other: _____
☐ Other: _____



*(Req. 110V power through ground fault interrupter (GFCI) receptacle / breaker)

**LIGATURE-RESISTANT DISCLAIMER


This product is designed to minimize ligature points. While every effort has been made to reduce the possibility of ligature points, this product does not eliminate all risks. Ligature-Resistant products by Willoughby Industries are to be used in conjunction with, not as a replacement for, trained professionals.

Approved For Manufacturing By: _____ Date: _____ Company: _____
Wall Thickness: _____ Wall Type: _____

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN
WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND
DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

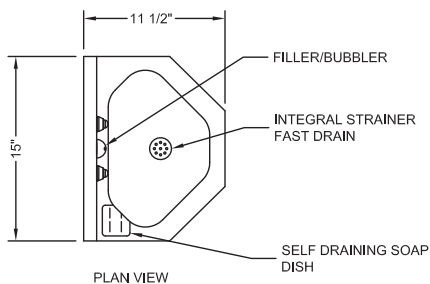

**SPECIFY X, XA, Y, &
HOLE Ø DIMENSIONS
AS NEEDED FOR
PUSH BUTTON HOLE
PUNCHING**

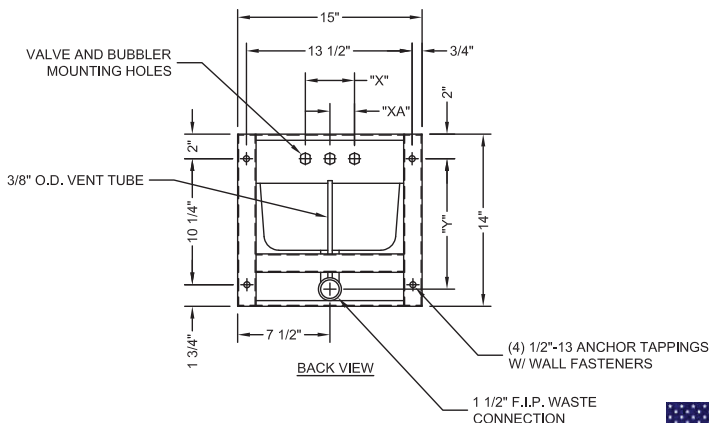

visit our website at www.willoughby-ind.com

5105 West 78th Street • Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.