




HS-1014-96-HC Stainless Steel 18" Wide Rear Mounted Handicap-ADA Compliant Rectangular Bowl Lavatory

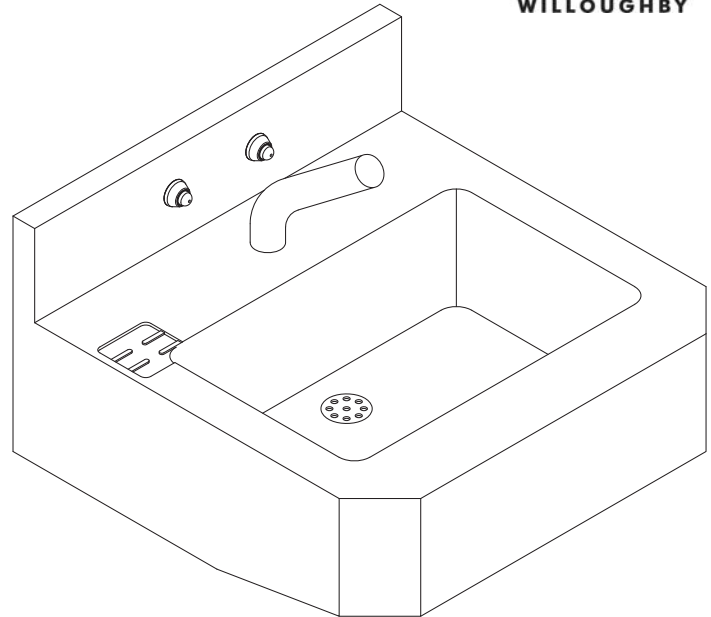

IN COMPLIANCE
WITH A.D.A. 2010

(Unit may be shown with optional features)

To specify fixture and accessories, use the Model Number and Options page.

Example: To specify an 18" Wide, Rear Mounted, Handicap-ADA Compliant, Rectangular Bowl Lavatory with dual temp. pneumatic metering valve, ligature-resistant pneumatic push buttons, deck mounted spout, standard Elbow Waste (1-1/2" Plain End), and wall sleeve

Use the following Willoughby Model Number:

HS-1014-96-HC-PML2-PBH-DMS-EB-WS

Recommended Specifications

Stainless Steel, 18" Wide, Rear Mounted, Handicap-ADA Compliant, Rectangular Bowl Lavatory shall be:

Willoughby Model No. **HS-1014-96-HC**

(Select from model number and options list on next page)

Fixture shall be fabricated from 14 GA., Type 304 stainless steel. The construction shall be all welded, with exposed stainless surfaces polished to a #4 satin finish.

Standard lavatory shall include:

- Rectangular-shaped bowl, 14-1/2" x 9-1/2" x 4-3/8" deep
- Fast drain with air vent
- Elbow Waste (1-1/2" Plain End)
- Self-draining soap dish
- 0.5 GPM flow rate

Cabinet interior shall be sound deadened with fire-resistant material.

Anchoring shall be by standard 4-point system: threaded rods, nuts and washers shall be furnished for walls up to 8" thick. Unit shall require chase area for installation and maintenance.

Note: Only deck mounted Willoughby lavatory spouts and filler/bubblers are available with this lavatory model.



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov

visit our website at www.willoughby-ind.com

5105 West 78th Street • Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.

MODEL NUMBER AND OPTIONS:

1.) Base Model Number:

- ☐ HS-1014-96-HC Stainless Steel, 18" Wide, Rear Mounted, Handicap-ADA Compliant, Rectangular Bowl Lavatory

2.) Spout/Bubbler Selection:

- ☐ DMS Deck Mounted Spout
☐ DMBH Ligature-resistant Deck Mounted Bubbler** (Not for ADA compliant drinking)

3.) Lavatory Valve Selection:

- ☐ NV No Valve (Select Hole Punching if needed)
☐ PML1 Single Temp. Pneumatic Metering
☐ PML2 Dual Temp. Pneumatic Metering
☐ E1L1 Single Temp. Electronic (pick control)*
☐ E1L2 Dual Temp. Electronic (pick control)*

Valve Manifold Options:

Pneumatic or Electronic Only:

- ☐ MA2 ☐ MA3 ☐ MA4

4.) Lavatory Valve Actuation:

- ☐ PBH Ligature-resistant Pneumatic Push Buttons**
☐ PZPB Ligature-resistant Piezo Electronic Push Buttons**

5.) Electronic Controls* (Must Use Electronic Push Button):

- ☐ WUCC-3010 ☐ Pneutronic ☐ WMSII
 (The WUCC-3010 Control can be used to pair a Lavatory with a Toilet)

6.) Hole Punching:

- ☐ 4CC 4" Centerset, Ø1-1/4" Holes (Specify 2 or 3 holes: ____)
☐ 8CC 8" Centerset, Ø1-1/4" Holes (Specify 2 or 3 holes: ____)
☐ 1CC Center Shank, (1) Ø1-1/4" Hole
☐ SP Special Punching (Specify hole punching dim.)
 SP: _____

7.) Lavatory Waste:

- ☐ EB Elbow Waste (1-1/2" Plain End) (Standard)
☐ PT Integral 'P'-Trap
☐ LWL Lavatory Waste Extension (Specify if more than 3")
☐ OV Lavatory Overflow
☐ SLOW Slow Drain
☐ LW1 Thru-Wall Extension, 'P'-Trap
☐ LW2 Thru-Wall Extension and Clean-Out
☐ LWC1 Coupling, 1-1/2" Tube to 1-1/2" Tube
☐ LWC2 Coupling, 1-1/2" Tube to 1-1/2" PVC/Cast Iron

8.) Options:

- ☐ MT Wall Template
☐ TB1 Single Toothbrush Holder
 ☐ Right ☐ Left
☐ TB2 Dual Toothbrush Holder
 ☐ Right ☐ Left
☐ TF24H Hard-wired Transformer, 110VAC to 24VAC*
☐ TF24P Plug-in Transformer, 110VAC to 24VAC*
☐ TH1 Single Towel Hook
 ☐ Right ☐ Left
☐ TH2 Dual Towel Hook
 ☐ Right ☐ Left
☐ DC Decorator Color (Fixture exterior only - White)
☐ WS Wall Sleeve (Requires Accessible Chase)
☐ ISH Integral Shelf
☐ VG Ventilation Grille (Specify Location and Free Area)
☐ DFBH Ligature-resistant Deck Mounted Drinking ADA Compliant Fountain Bubbler**/***
 *** (Panel Mounted Push Button)
☐ Other: _____
☐ Other: _____


*(Req. 110V power through ground fault interrupter (GFCI) receptacle / breaker)

**LIGATURE-RESISTANT DISCLAIMER

This product is designed to minimize ligature points. While every effort has been made to reduce the possibility of ligature points, this product does not eliminate all risks. Ligature-Resistant products by Willoughby Industries are to be used in conjunction with, not as a replacement for, trained professionals.

Approved For Manufacturing By: _____ Date: _____ Company: _____
 Wall Thickness: _____ Wall Type: _____

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN
 WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

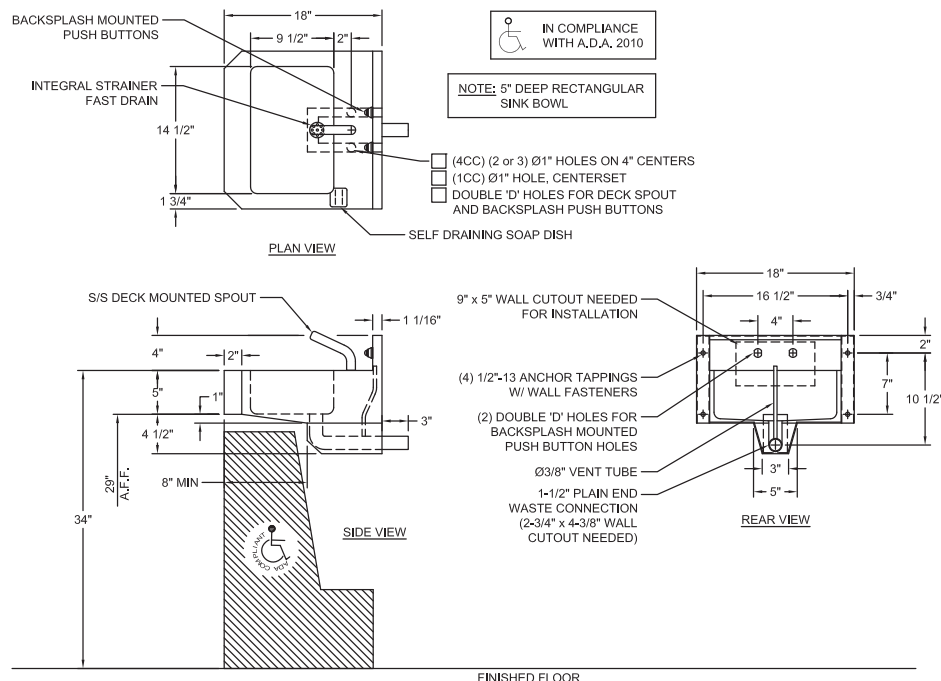

visit our website at www.willoughby-ind.com

5105 West 78th Street • Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.