



WILLOUGHBY LRFC SERIES

LIGATURE-RESISTANT FAUCETS



The ligature-resistant faucet (LRFC)—available in an infrared, pneumatic push button, or piezo electronic push button configuration—is recommended for high-use areas where risk accommodations are a concern, such as behavioral and mental health facilities.

Polished stainless steel

Adjustable angle of spray

Non-aerated, laminar flow

GREAT FOR RETROFIT APPLICATIONS



DESIGNED FOR SAFETY

Featuring a contoured design, our faucet is the right choice for settings where self-harm is a possibility.



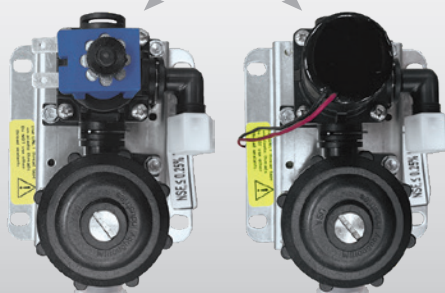
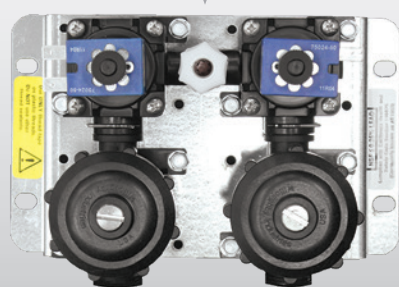
RETROFIT CAPABLE

With the 4" center set, our faucet is ready for new construction projects or retrofitting existing lavatories.



MOUNTING HARDWARE

Our faucet comes with all the necessary mounting hardware to install on lavatories and provide a water-tight seal.

**Piezo Electronic (LRFC-PZPB)**

7.5" (W) x 4.0" (H) x 4.375" (D)

Infrared Sensor (LRFC-IR/BO)

6.5" (W) x 4.5625" (H) x 4.375" (D)

Pneumatic (LRFC-PBH)

7.5" (W) x 4.0" (H) x 4.375" (D)

TECHNICAL SPECIFICATIONS

Material	Cast 304 Stainless Steel
Finish	High-polished
Type	4" center set
Overall Width	6.5" – 7.5"
Overall Height	4" – 4.5625"
Angle of Spray	35°
Max. Swivel Adjustment	16°
Max. Flow Rate	1.5 GPM

Flow Type	Non-aerated, laminar
Power Supply	Varies
Retrofit Capable	Yes
Ligature-Resistant	Yes
Vandal-Resistant	Yes
ADA Compliant¹	Yes

¹When mounted properly on fixture.

REVIT
FILES ARE
AVAILABLE
ON OUR
WEBSITE

5105 West 78th Street, Indianapolis, IN 46268
toll free 800.428.4065 • fax 317.875.0837
www.willoughby-ind.com



WILLOUGHBY
COUNT ON US.